




**大豪电子**  
电话: 0775-83233025  
<http://www.szdahao.com>  
<http://www.very-tec.com>

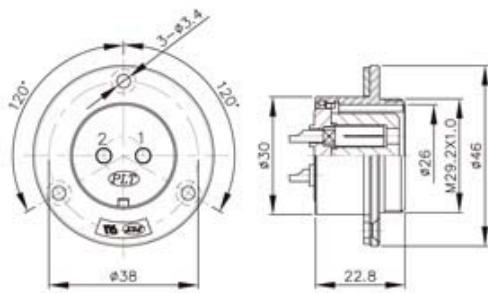

PLT-30-RF

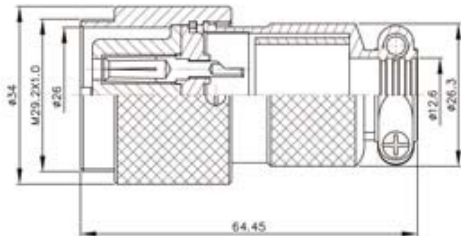

PLT-30-ADF

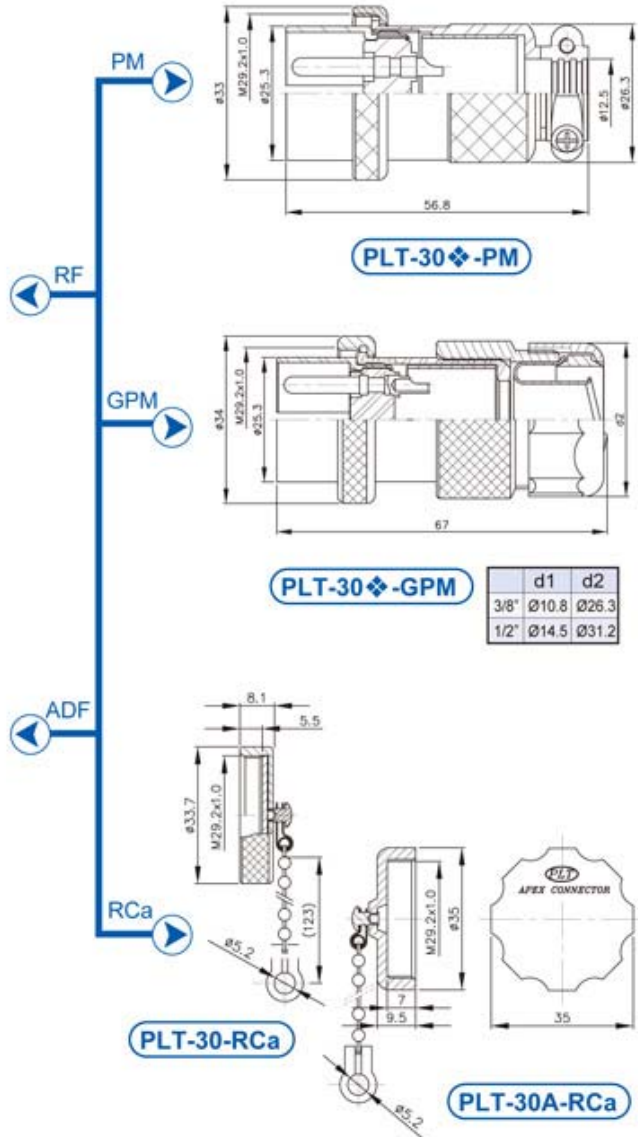

◆ No. of contacts	2	3	4	5	7	8	
Contacts Configuration							
Rated current / voltage	15A 250V	15A 250V	15A 250V	15A 250V	15A 250V	5A 250V	
Operation limit voltage (AC.V.rms)	400	400	400	400	400	300	
Withstanding voltage (AC.V.rms) 1 minute	2000	2000	2000	1800	1800	1800	
Insulation resistance (MΩ MIN.) at DC 500V	2000	2000	2000	2000	2000	2000	
Contact resistance (MΩ MAX.) at DC 1A	3	3	3	3	3	3	
Solder inter diameter	2.8	2.8	2.8	2.8	2	2.5	