


# SANYO Cadnica

**大豪电子**  
 电话: 0755-83233025  
<http://www.szdahao.com>  
<http://www.very-tec.com>


## Cell Type N-700AAC Specifications

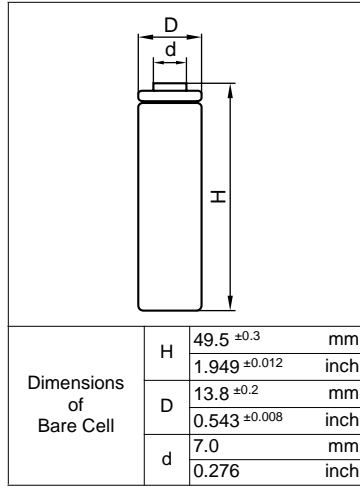


Capacity	700mAh		
Nominal Voltage	1.2V		
Charging Current	Standard	70mA	
	Quick	210mA	
	Fast	1050mA	
Charging Time	Standard	14 to 16Hrs.	
	Quick	4 to 6Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]
		Quick	10°C to +45°C [+50°F to 113°F]
		Fast	0°C to +45°C [+32°F to 113°F]
	Discharge	-20°C to +60°C [-4°F to 140°F]	
	Storage	-30°C to +50°C [-22°F to 122°F]	
Internal Impedance (Av.) (at 50% discharge)	16.0mΩ (at 1000Hz)		
Weight	23g/0.81oz		
Dimensions(D)×(H) (with tube)	14.3 <sup>0</sup> <sub>-0.5</sub> × 50.2 <sup>0</sup> <sub>-1</sub>	mm	
	0.56 <sup>0</sup> <sub>-0.02</sub> × 1.98 <sup>0</sup> <sub>-0.04</sub>	inch	

### Typical Characteristics


#### Charge

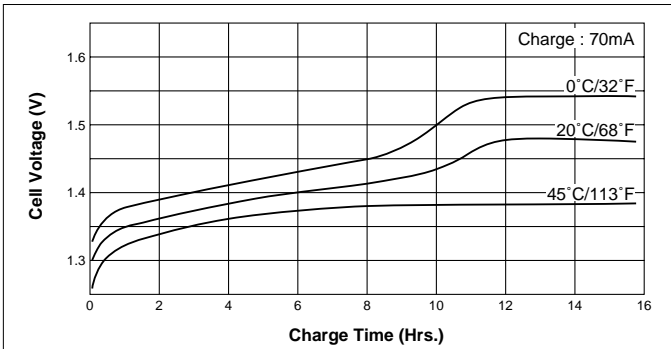


#### Discharge (at high rate)

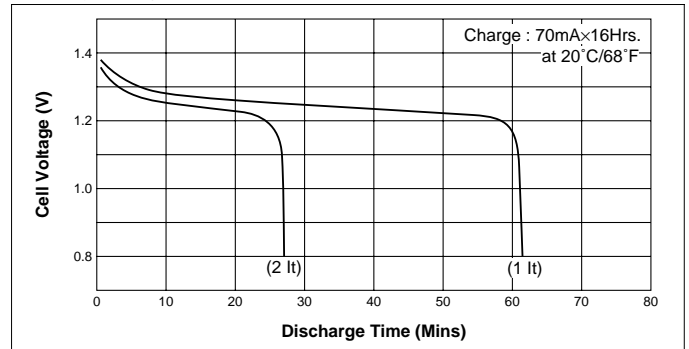


#### Charge

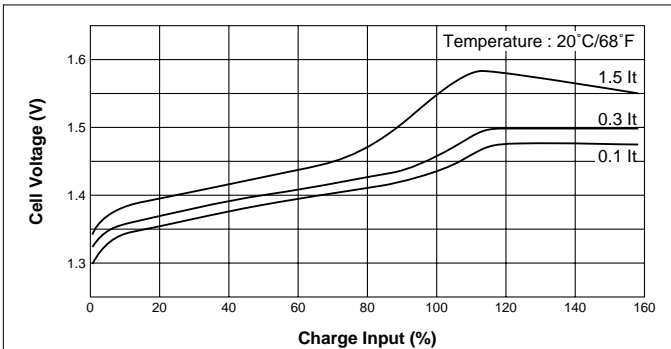

#### Discharge (at high rate)

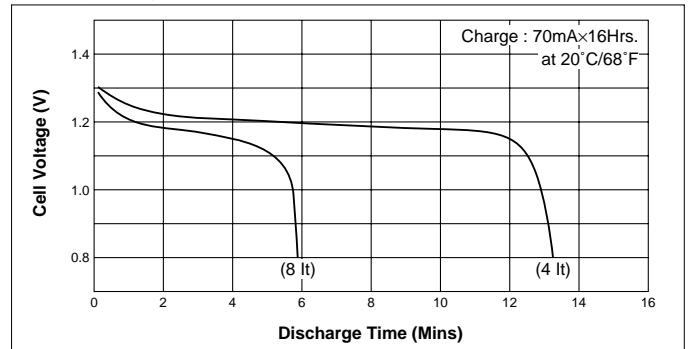

#### Discharge (at low rate)

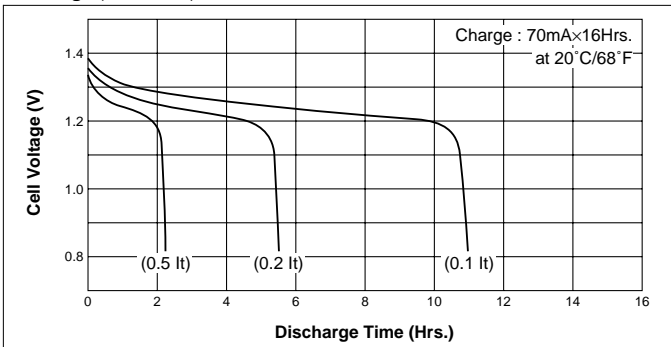

#### Temperature (Charge & Discharge)

