


規格

項目 / 型號	YO01T1/YO01T3	YO03T1/YO03T3	YO06T1/YO06T3	YO10T1/YO10T3	
額定電壓	125/250V AC	125/250V AC	125/250V AC	125/250V AC	
額定電流	1A	3A	6A	10A	
洩漏電流	0.8mA MAX 250V,50HZ	0.8mA MAX 250V,50HZ	0.8mA MAX 250V,50HZ	0.8mA MAX 250V,50HZ	
耐線對線 電壓	1450V DC	1450V DC	1450V DC	1450V DC	
線對地	2250V DC	2250V DC	2250V DC	2250V DC	
絕緣阻抗	100M ohm MIN 250VDC	100M ohm MIN 250VDC	100M ohm MIN 250VDC	100M ohm MIN 250VDC	
直流阻抗	0.5 ohm MAX	0.2 ohm MAX	0.15 ohm MAX	0.1 ohm MAX	
溫度上升	30C MAX	30C MAX	30C MAX	30C MAX	
溫度使用範圍	-25 ~ +85C	-25 ~ +85C	-25 ~ +85C	-25 ~ +85C	
CX	0.1uF Max	0.1uF Max	0.1uF Max	0.1uF Max	
CY	3300pF Max	3300pF Max	3300pF Max	3300pF Max	
電阻	1M,10M/ohm	1M,10M/ohm	1M,10M/ohm	1M,10M/ohm	
電感值	3.7mH	1.8mH	0.7mH	0.3mH	
衰減量 25dbMIN	NORMAL MODE	0.60 ~ 45MHZ	0.80 ~ 50MHZ	0.80 ~ 50MHZ	1.00 ~ 50MHZ
	COMMON MODE	0.10 ~ 40MHZ	0.20 ~ 50MHZ	0.40 ~ 50MHZ	1.00 ~ 50MHZ

3. 衰減量 (0.1uF,3300pF)


COMMON MODE (LINE TO GROUND) IN 50 OHM SYSTEM							
TYPE	CURRENT	FREQUENCY-MHZ					
	RATING	0.15	0.5	1.0	5.0	10.0	30.0
YO01T1/YO01T3	1A	26	32	35	41	42	43
YO03T1/YO03T3	3A	21	27	33	41	43	40
YO06T1/YO06T3	6A	14	22	26	39	43	44
YO10T1/YO10T3	10A	5	15	19	33	39	43
DIFFERENTIAL MODE (LINE TO LINE) IN 50 OHM SYSTEM							
YO01T1/YO01T3	1A	9	19	23	44	45	42
YO03T1/YO03T3	3A	8	17	21	44	44	38
YO06T1/YO06T3	6A	6	16	21	38	42	43
YO10T1/YO10T3	10A	4	14	18	34	42	36

4. 線路圖

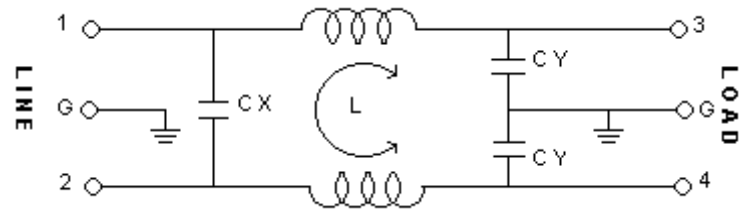


5. 尺寸圖

YO01T1~YO10T1

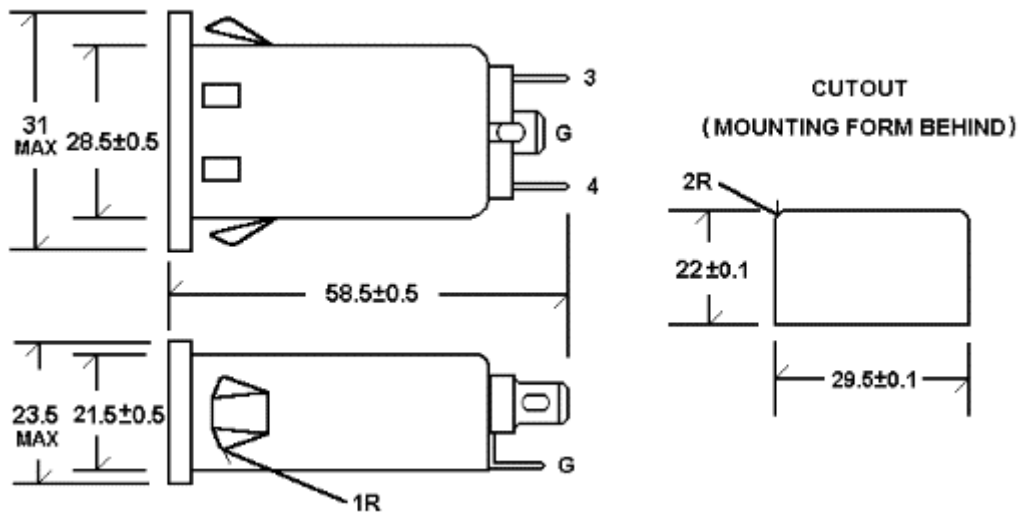

YO01T3~YO10T3

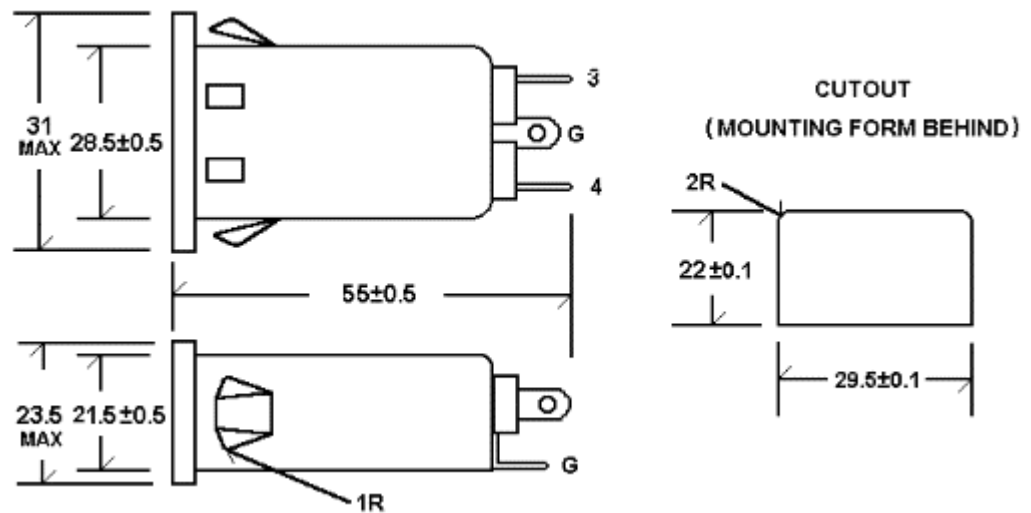

大豪电子

电话: 0755-83233025

<http://www.szdahao.com>

<http://www.very-tec.com>